


DRAG LINK CHAINS

BRITISH AND AMERICAN PATTERN



'H' CLASS STYLE

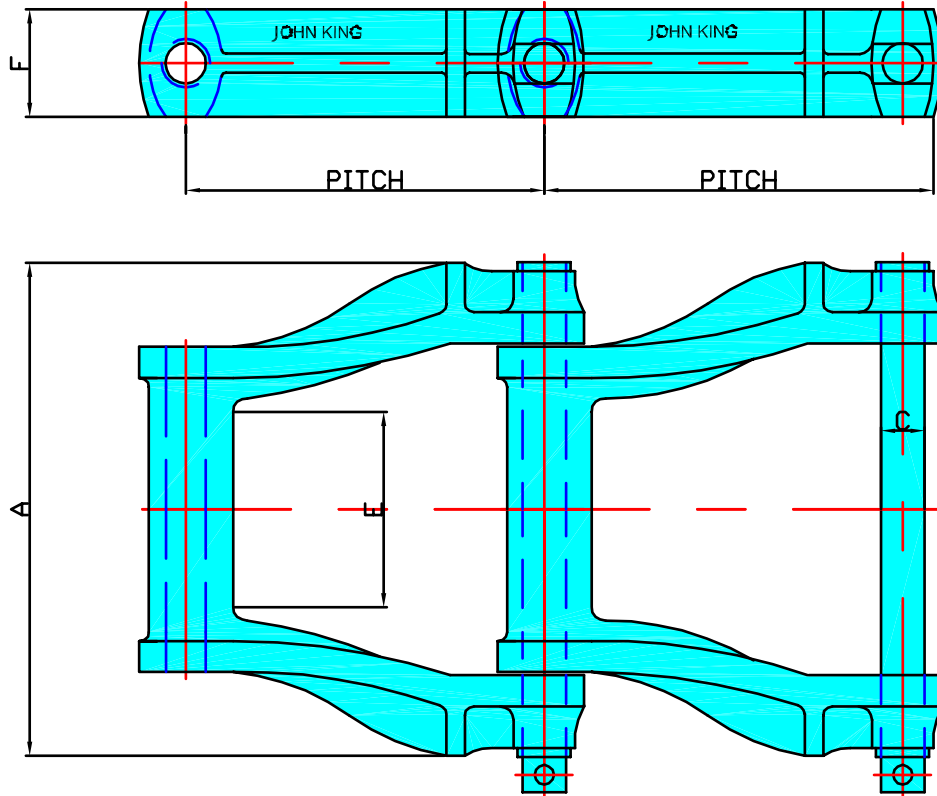

CHAIN N°	PITCH		A		C		E		F		N° OF LINKS IN 10ft	ULTIMATE STRENGTH		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm		lb	kg	lb/ft	kg/m
H97	5.00	127	6½	165	⅞	14	3½	89	1⅝	35	24	20000	9080	7.8	11.64
H102	5.00	127	9¾	248	⅝	16	6¾	162	1½	38	24	28000	12720	10.7	15.97
H104	6.00	152	7½	191	⅝	16	4⅛	105	1½	38	20	28000	12720	8.0	11.94
H106	6.00	152	10½	267	⅝	16	7	178	1½	38	20	24000	10900	12.5	18.70
H110	6.00	152	12½	318	⅝	16	9	229	1½	38	20	28000	12720	12.9	19.22
H112	8.00	203	12½	318	⅝	16	9	229	1½	38	15	28000	12720	10.8	16.07
H116	8.00	203	16¾	416	⅝	16	13	330	1⅝	41	15	28000	12720	14.6	21.71
H120	6.00	152	12⅞	327	¾	19	8¾	222	2	51	20	38000	17250	18.5	27.49
H480	8.00	203	19	406	¾	19	11⅞	283	2	51	15	40000	18200	18.1	26.96



(UK) John King Chains Limited.
 New Climax Works, Lancaster Way, Sherburn in Elmet LS25 6NS UK
 Telephone: (44) 01977 681910 Facsimile: (44) 01977 681899
 E-mail: admin@johnking-chain.com
 technical@johnking-chain.com
 sales@johnking-chain.com

John King (USA) Inc.
 200 Catherine Street, Unit 7B, E. Peoria IL61611 USA
 Telephone: 309-698-9250 Facsimile: 309-698-9259
 E-mail: salesusa@johnking-chain.com

Web: www.johnkingchains.com