


CONVEYOR CHAINS

BRITISH STANDARD SOLID PINS PLAIN ROLLERS



CHAIN N°	P mm	Li mm	Dr mm	Db mm	Df mm	Dp mm	Hp mm	Si mm	Se mm	Im mm	IX mm	ULTIMATE STRENGTH	WEIGHT/METER Kg/m
HP 20 / 0381 / P	38.10											4500lb	2.00
HP 20 / 0508 / P	50.08	12.7	25.4	13	6.6	9.53	20	2.3	1.8	29.5	32.3	2700kg	1.65
HP 20 / 0635 / P	63.50												1.46
HP 20 / 0762 / P	76.70												1.34
HP 27 / 0508 / P	50.8											6000lb	4.00
HP 27 / 0762 / P	76.2	15.0	31.80	18.0	10.2	14.0	25.0	4.0	4.0	36.0	44.0	2700kg	3.40
HP 27 / 1016 / P	101.6												2.80
HP 27 / 1270 / P	127.0												2.42
HP 27 / 1524 / P	152.4												2.00
HP 55 / 0762 / P	76.2											12000lb	6.50
HP 55 / 1016 / P	101.6												5.60
HP 55 / 1270 / P	127.0	19.0	47.60	23.60	13.20	19.0	40.0	5.0	4.0	44.0	51.0	5450kg	5.00
HP 55 / 1524 / P	152.4												4.70
HP 55 / 1778 / P	177.8												4.40
HP 55 / 2032 / P	203.2												4.15
HP 110 / 1016 / P	101.6											24000lb	11.10
HP 110 / 1270 / P	127.0												10.00
HP 110 / 1524 / P	152.4	25.4	66.70	33.0	19.60	26.9	50.0	7.0	5.0	58.0	65.0	10900kg	9.00
HP 110 / 1778 / P	177.8												8.90
HP 110 / 2032 / P	203.2												8.25
HP 110 / 2540 / P	254.0												7.40
HP 160 / 1270 / P	127.0											36000lb	21.40
HP 160 / 1524 / P	152.4												19.70
HP 160 / 1778 / P	177.8	38.0	89.00	38.10	22.90	31.80	60.0	9.0	8.0	80	90.0	16364kg	18.20
HP 160 / 2032 / P	203.2												17.07
HP 160 / 2540 / P	254.0												16.07
HP 160 / 3048 / P	304.8												

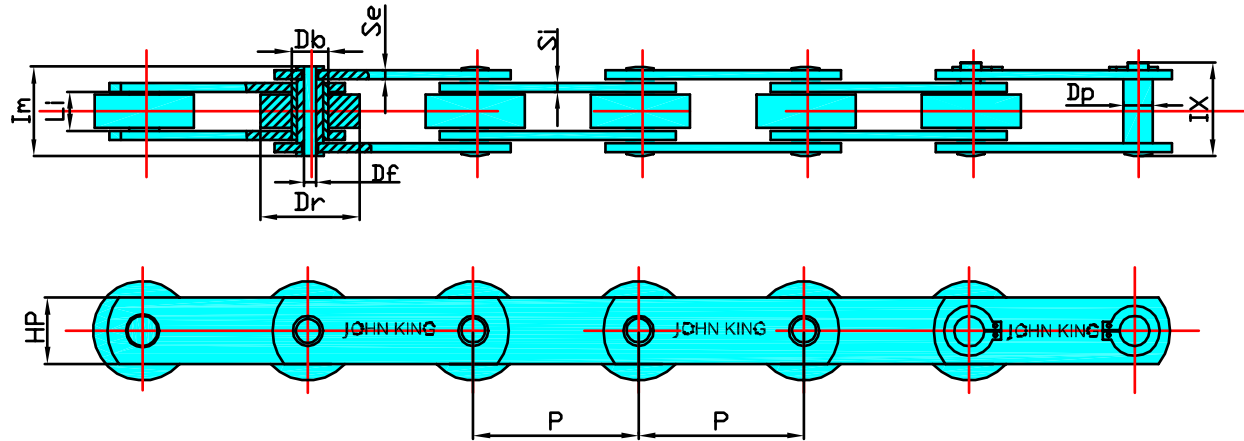

(UK) John King Chains Limited.
New Climax Works, Lancaster Way, Sherburn in Elmet LS25 6NS UK
Telephone: (44) 01977 681910 Facsimile: (44) 01977 681899
E-mail: admin@johnking-chain.com
technical@johnking-chain.com
sales@johnking-chain.com

John King (USA) Inc.
200 Catherine Street, Unit 7B, E. Peoria IL61611 USA
Telephone: 309-698-9250 Facsimile: 309-698-9259
E-mail: salesusa@johnking-chain.com

Web: www.johnkingchains.com