


## CONVEYOR CHAINS

## FVT SERIES DIN 8165 DEEP LINK SERIES



DIN N°	P mm	Li mm	Dr mm	Db mm	Dp mm	Hp mm	H mm	S mm	Im mm	IX mm	BREAKING LOAD		CHAIN WEIGHT Kg-m
											N	N *	
FVT 140	100	35	60	25	18	60	37.5	6	67	71.5	145.000	210.000	16.8
FVT 140	125	35	60	25	18	60	37.5	6	67	71.5	145.000	210.000	14.6
FVT 140	160	35	60	25	18	60	37.5	6	67	71.5	145.000	210.000	12.6
FVT 140	200	35	60	25	18	60	37.5	6	67	71.5	145.000	210.000	11.3
FVT 140	250	35	60	25	18	60	37.5	6	67	71.5	145.000	210.000	10.1
FVT 180	125	45	70	30	20	70	45	8	86	92	190.000	300.000	24.2
FVT 180	160	45	70	30	20	70	45	8	86	92	190.000	300.000	20.8
FVT 180	200	45	70	30	20	70	45	8	86	92	190.000	300.000	18.4
FVT 180	250	45	70	30	20	70	45	8	86	92	190.000	300.000	16.5
FVT 180	315	45	70	30	20	70	45	8	86	92	190.000	300.000	14.9
FVT 250	160	55	80	36	26	80	50	8	97	103.5	275.000	360.000	28.2
FVT 250	200	55	80	36	26	80	50	8	97	103.5	275.000	360.000	24.5
FVT 250	250	55	80	36	26	80	50	8	97	103.5	275.000	360.000	21.7
FVT 250	315	55	80	36	26	80	50	8	97	103.5	275.000	360.000	19.3

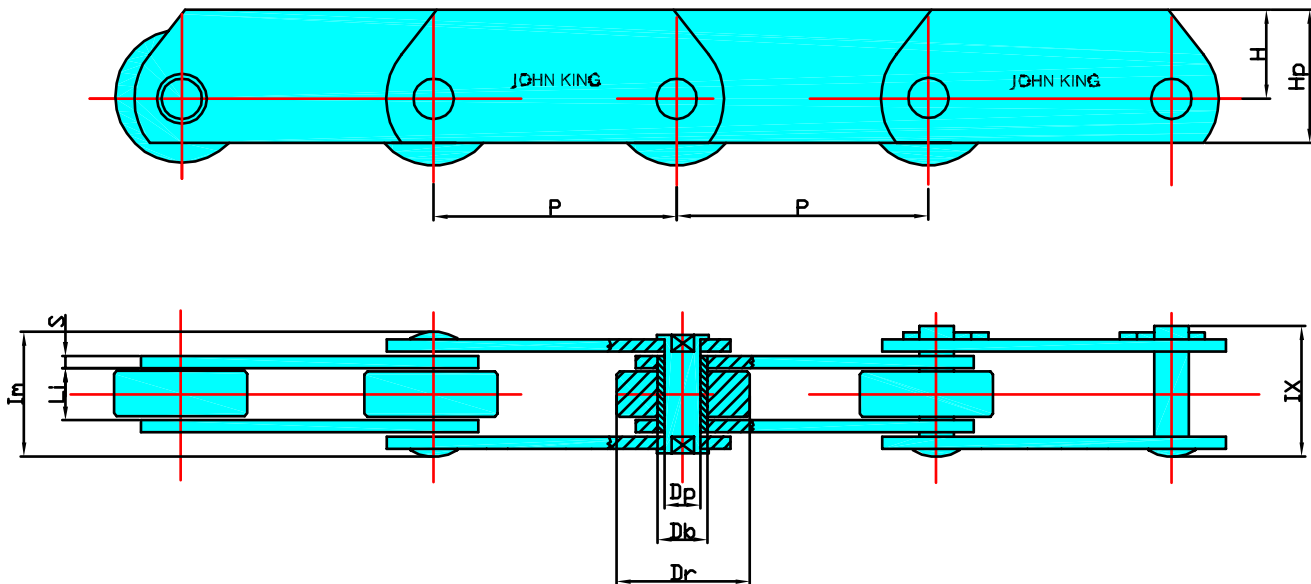

(UK) John King Chains Limited.  
New Climax Works, Lancaster Way, Sherburn in Elmet LS25 6NS UK  
Telephone: (44) 01977 681910 Facsimile: (44) 01977 681899  
E-mail: [admin@johnking-chain.com](mailto:admin@johnking-chain.com)  
[technical@johnking-chain.com](mailto:technical@johnking-chain.com)  
[sales@johnking-chain.com](mailto:sales@johnking-chain.com)

John King (USA) Inc.  
200 Catherine Street, Unit 7B, E. Peoria IL61611 USA  
Telephone: 309-698-9250 Facsimile: 309-698-9259  
E-mail: [salesusa@johnking-chain.com](mailto:salesusa@johnking-chain.com)

Web: [www.johnkingchains.com](http://www.johnkingchains.com)