


## SPECIAL SERIES CHAINS

## ENGINEERED STEEL BUSHED CHAIN

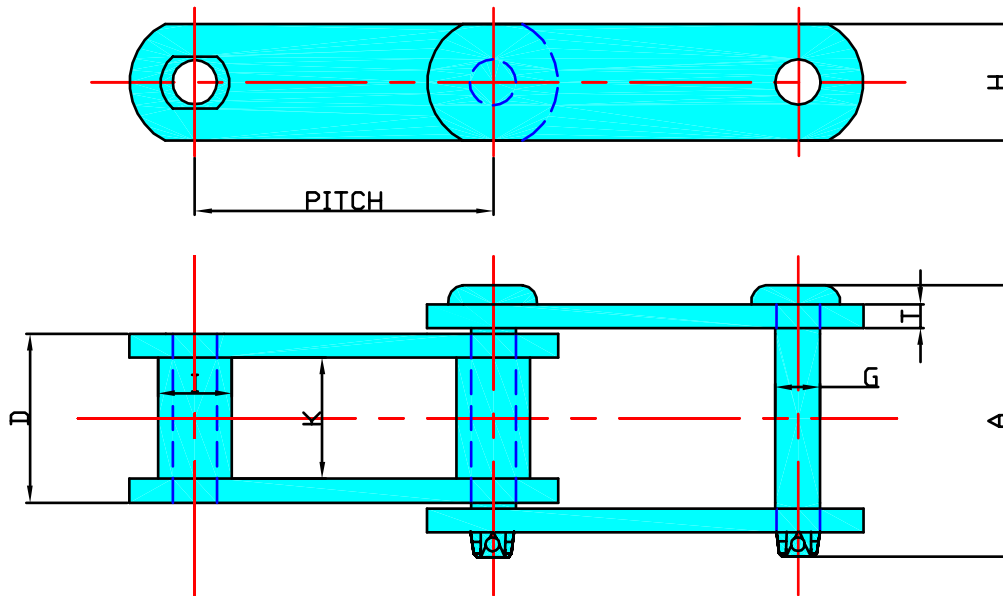

All Strengths, Weights and Loads are in pounds

CHAIN N°	PITCH		RATED WORKING LOAD	MIN ULTIMATE STRENGTH	AVERAGE WEIGHT PER FOOT	A		K		T		G		D	
	in	mm				in	mm	in	mm	in	mm	in	mm	in	mm
SS188	2.609	66.27	2,740	23	3.8	2.69	68.33	1.06	26.92	0.25	6.35	0.50	12.7	1.57	39.86
SS131	3.075	78.11	4,450	36	7.4	3.52	89.4	1.31	33.27	0.38	9.65	0.63	16	2.06	52.32
SS102B	4.00	101.6	6,300	36	6.9	4.37	111	2.13	54.1	0.38	9.65	0.63	16	2.89	73.4
SS110	6.00	152.4	6,300	36	6.3	4.37	111	2.13	54.1	0.38	9.65	0.63	16	2.89	73.4
JK5239	6.00	152.4	8,850	-	9.5	4.938	125.43	2.625	66.68	0.375	9.53	0.75	19.05	3.375	85.73
JK2588	4.04	102.6	9,500	-	-	4.06	99.47	2.28	58	0.35	9	1	25.4	3	76.2
JK2589	6.05	153.7	-	-	-	5.88	149.4	3.37	85.6	0.5	12.7	1.125	28.58	5.5	139.7

H		I	
in	mm	in	mm
0.88	22.35	0.88	22.35
1.5	38.1	1.25	31.75
1.5	38.1	1.00	25.4
1.5	38.1	1.25	31.75
2.0	50.8	1.438	36.53
2.56	65.02	1.5	38.1
3.15	80.01	1.75	44.45

Note:- All sidebars  
are Thru-Hardened



(UK) John King Chains Limited.  
New Climax Works, Lancaster Way, Sherburn in Elmet LS25 6NS UK  
Telephone: (44) 01977 681910 Facsimile: (44) 01977 681899  
E-mail: admin@johnking-chain.com  
technical@johnking-chain.com  
sales@johnking-chain.com

John King (USA) Inc.  
200 Catherine Street, Unit 7B, E. Peoria IL61611 USA  
Telephone: 309-698-9250 Facsimile: 309-698-9259  
E-mail: salesusa@johnking-chain.com

Web: www.johnkingchains.com