


FORGED FORK LINK CHAINS

STANDARD SERIES

Link Material Options

* Manganese Alloy Steel (18MnCr B5)
* Chrome-Nickel Alloy Steel (18NiCrMo5) Case Hardened (CN)
* Carbon Steel (C45) Hardened & Tempered (C)
* Chrome Molly Alloy Steel (42CrMo4) Hardened Tempered (CD)
* Stainless Steel AISI 304 (S3) AISI 420 (S4) AISI 316 (S5)

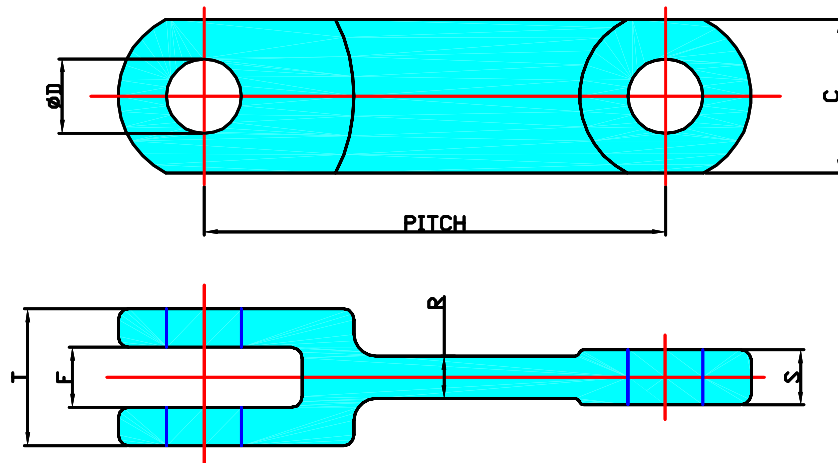

All measurements in mm. Ultimate strength KN

CHAIN N°	PITCH	T	C	S	F	R	φD
10160	101.6	24	36	8	10	6	14
10160/R	101.6	30	36	13	14	9	14
14218	142	42	50	19	20	11	25
14226	142	62	50	28	30	15	25
21640	216	64	72	26	28	20	35
26040	260	70	75	31	33	20	32

CHAIN N°	AVERAGE ULTIMATE STRENGTH			
	MN	CN	C	CD
10160	110	120	150	210
10160/R	180	195	235	330
14218	290	320	370	550
14226	440	470	570	790
21640	720	820	980	1200
26040	840	900	1100	1480



Forged Chain Specialist
Paul Hale
Tel/Fax: (44) 01453 549021
Mobile: 07725 670141
E-mail:
hale@lindenlea60.freeserve.co.uk

(UK) John King Chains Limited.
New Climax Works, Lancaster Way, Sherburn in Elmet LS25 6NS UK
Telephone: (44) 01977 681910
Facsimile: (44) 01977 681899
E-mail: admin@johnking-chain.com
technical@johnking-chain.com
sales@johnking-chain.com

John King (USA) Inc.
200 Catherine Street, Unit 7B, E. Peoria IL61611 USA
Telephone: 309-698-9250
Facsimile: 309-698-9259
E-mail: salesusa@johnking-chain.com

Web: www.johnkingchains.com

FS1.1