


## CONVEYOR CHAINS

## FV SERIES DIN 8165 HOLLOW PIN CHAIN

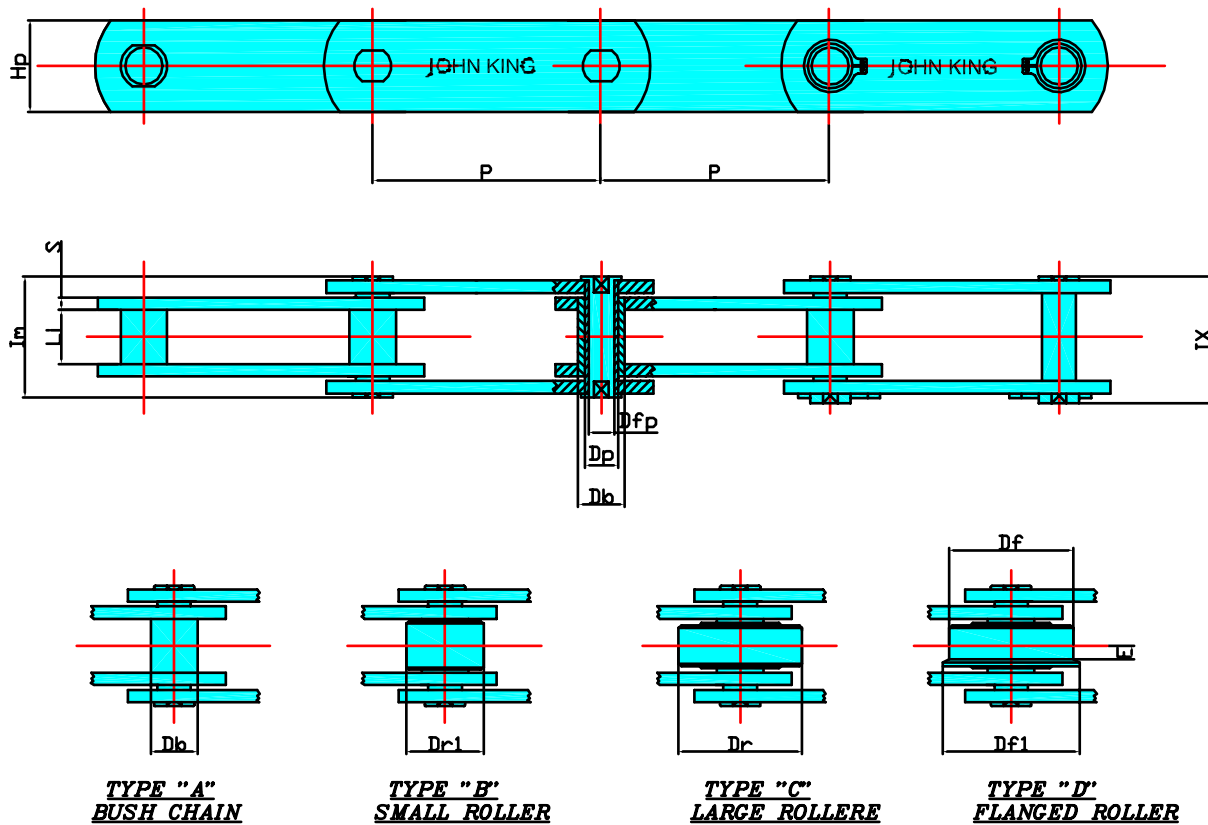

**TYPE "A"**  
**BUSH CHAIN**

**TYPE "B"**  
**SMALL ROLLER**

**TYPE "C"**  
**LARGE ROLLER**

**TYPE "D"**  
**FLANGED ROLLER**

| DIN<br>N°  | P<br>mm | Li<br>mm | Dr1<br>mm | Dr<br>mm | Df<br>mm | Df1<br>mm | F<br>mm | Db<br>mm | Dp<br>mm | Dfp<br>mm | Hp<br>mm | S<br>mm | Im<br>mm | IX<br>mm | BREAKING<br>LOAD |         |
|------------|---------|----------|-----------|----------|----------|-----------|---------|----------|----------|-----------|----------|---------|----------|----------|------------------|---------|
|            |         |          |           |          |          |           |         |          |          |           |          |         |          |          | N                | N *     |
| FV 63 63   | 63      | 22       | 26        | 40       | 50       | 63        | 5       | 18       | 12       | 8         | 30       | 4       | 45       | 50.5     | 46.000           | 75.000  |
| FV 63 80   | 80      | 22       | 26        | 40       | 50       | 63        | 5       | 18       | 12       | 8         | 30       | 4       | 45       | 50.5     | 46.000           | 75.000  |
| FV 63 100  | 100     | 22       | 26        | 40       | 50       | 63        | 5       | 18       | 12       | 8         | 30       | 4       | 45       | 50.5     | 46.000           | 75.000  |
| FV 63 125  | 125     | 22       | 26        | 40       | 50       | 63        | 5       | 18       | 12       | 8         | 30       | 4       | 45       | 50.5     | 46.000           | 75.000  |
| FV 63 160  | 160     | 22       | 26        | 40       | 50       | 63        | 5       | 18       | 12       | 8         | 30       | 4       | 45       | 50.5     | 46.000           | 75.000  |
| FV 90 63   | 63      | 25       | 30        | 48       | 63       | 78        | 6.5     | 20       | 14       | 10        | 35       | 5       | 53       | 56.5     | 73.000           | 90.000  |
| FV 90 80   | 80      | 25       | 30        | 48       | 63       | 78        | 6.5     | 20       | 14       | 10        | 35       | 5       | 53       | 56.5     | 73.000           | 90.000  |
| FV 90 100  | 100     | 25       | 30        | 48       | 63       | 78        | 6.5     | 20       | 14       | 10        | 35       | 5       | 53       | 56.5     | 73.000           | 90.000  |
| FV 90 125  | 125     | 25       | 30        | 48       | 63       | 78        | 6.5     | 20       | 14       | 10        | 35       | 5       | 53       | 56.5     | 73.000           | 90.000  |
| FV 90 160  | 160     | 25       | 30        | 48       | 63       | 78        | 6.5     | 20       | 14       | 10        | 35       | 5       | 53       | 56.5     | 73.000           | 90.000  |
| FV 90 200  | 200     | 25       | 30        | 48       | 63       | 78        | 6.5     | 20       | 14       | 10        | 35       | 5       | 53       | 56.5     | 73.000           | 90.000  |
| FV 90 250  | 250     | 25       | 30        | 48       | 63       | 78        | 6.5     | 20       | 14       | 10        | 35       | 5       | 53       | 56.5     | 73.000           | 90.000  |
| FV 112 100 | 100     | 30       | 32        | 55       | 72       | 90        | 7.5     | 22       | 16       | 11        | 40       | 6       | 62       | 66       | 90.000           | 130.000 |
| FV 112 125 | 125     | 30       | 32        | 55       | 72       | 90        | 7.5     | 22       | 16       | 11        | 40       | 6       | 62       | 66       | 90.000           | 130.000 |
| FV 112 160 | 160     | 30       | 32        | 55       | 72       | 90        | 7.5     | 22       | 16       | 11        | 40       | 6       | 62       | 66       | 90.000           | 130.000 |
| FV 112 200 | 200     | 30       | 32        | 55       | 72       | 90        | 7.5     | 22       | 16       | 11        | 40       | 6       | 62       | 66       | 90.000           | 130.000 |
| FV 112 250 | 250     | 30       | 32        | 55       | 72       | 90        | 7.5     | 22       | 16       | 11        | 40       | 6       | 62       | 66       | 90.000           | 130.000 |



(UK) John King Chains Limited.  
New Climax Works, Lancaster Way, Sherburn in Elmet LS25 6NS UK  
Telephone: (44) 01977 681910 Facsimile: (44) 01977 681899  
E-mail: admin@johnking-chain.com  
technical@johnking-chain.com  
sales@johnking-chain.com

John King (USA) Inc.  
200 Catherine Street, Unit 7B, E. Peoria IL61611 USA  
Telephone: 309-698-9250 Facsimile: 309-698-9259  
E-mail: salesusa@johnking-chain.com

Web: www.johnkingchains.com